

**Arnold Engineering Development Center Arnold Air Force Base, Tenn. 37389** 

An Air Force Materiel Command Test Facility

Test Before Flight

America's Aerospace Advantage



www.arnold.af.mil

## **Mark 1 Test Facility**

The Mark I Test Facility is a state-of-the-art space environment simulation test chamber for full-scale space systems testing. A \$1.5M dollar upgrade in fiscal year 2000 replaced existing oil diffusion pumps with a complete dry pumping system, cleaned the interior of the chamber and refinished the surface the (LN<sub>2</sub>) thermal shroud. A new Hewlett Packard 3852, with 1,500 channels of data capability, replaced the previous Micro-Vax data system. These upgrades, combined with the shear size of the facility, at 42 ft diameter by 82 ft, postures AEDC for future testing of full-scale satellites and other space systems requiring a contamination-free test environment.

## Capabilities:

Thermal Chamber is completely lined with a liquid

nitrogen shroud that can provide thermal conditions down to 77 degrees Kelvin.

Vacuum Range  $\leq 5x10^{-7}$  Torr to local atmospheric pressure.

Working Volume 36 foot diameter x 70 foot tall.

Support Structure 200,000 pounds /12-foot-square seismic mass

provides vibration isolated of test articles.

Pumping System Mechanical roughing pumps, turbo molecular

and cryogenic high vacuum pumps, all with

cryogenic traps.

Loading Vertical: 20-foot opening in top of chamber, via a 15-ton precision crane. Horizontal: 8-foot diameter

manway in the chamber side near the bottom.

Cold Wall Lined with 77 degrees Kelvin liquid nitrogen, cryogenic shroud.

Special Features Laminar flow optical quality clean room (400 square foot, better than Class 1000).

15-ton precision crane.

Data All facility data time tagged and archived. 1,500 channel test data system available.

Work Areas Test customer offices available. Limited hardware storage available. Two large bay areas available for

test article build-up.

Solar Simulation Infrared lamp arrays available for thermal cycling.


Other 15 degrees Kelvin gaseous helium cryopumping capability available.



AEDC Public Affairs • 100 Kindel Drive, Suite B-213 • Arnold AFB, TN 37389-2213 (931) 454-5586 • DSN (931) 340-5586

For information on AEDC visit our Web site at www.arnold.af.mil

Release 2002-325

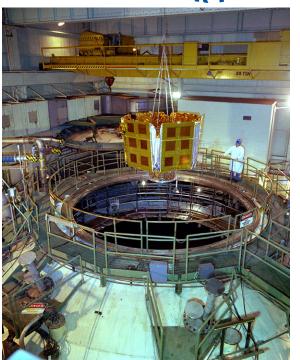

A Map Test in Mark I Photo